


CORE PIN RETAINERS

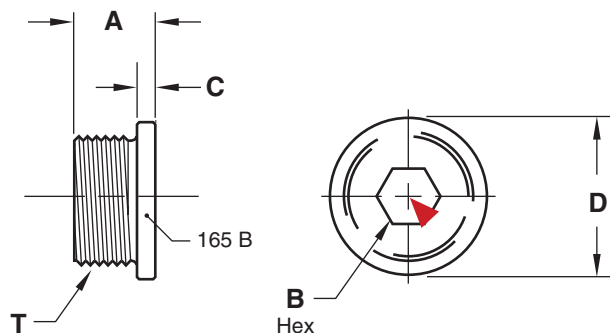

Inch Standard

M AISI 12L14 **H** 165 Brinell **S** Black Oxide

▶ CAD insertion point

CATALOG NUMBER	A +.002 -.000	C +.000 -.002	D O.D.	B Hex	T Thread
CPR-50	.437	.125	.750	.25	1/2-20
CPR-87	.437	.125	1.060	.37	7/8-14

Metric Standard

M AISI 12L14 **H** 165 Brinell **S** Black Oxide

CATALOG NUMBER	A +.00 -.05	C +.00 -.05	D O.D.	B Hex	T Thread
CPRM-16	11	4	20	8	M16-1.5

CPR-50

Core Pin Diameter	H
3/32ø - 9/64ø	.563
5/32ø	.594
11/64ø - 1/4ø	.625
9/32ø	.688


CPR-87

Core Pin Diameter	H
5/16ø - 1/2ø	.688


CPRM-16

Core Pin Diameter	H
2 - 2.5mm	13 mm
3 - 6mm	14 mm

Machining Specifications: CPR-50

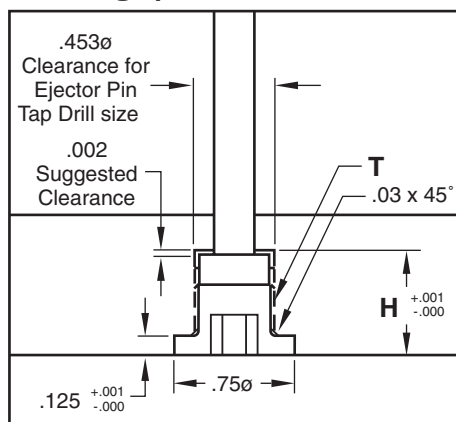

Machining Specifications: CPR-87

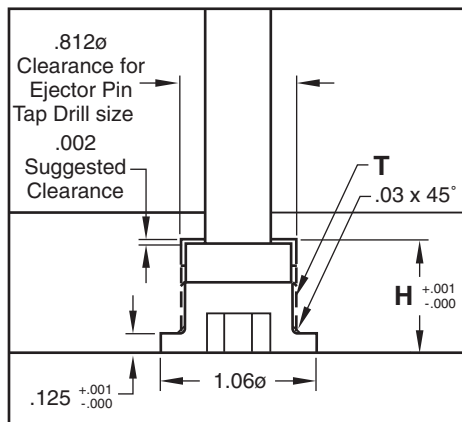

Machining Specifications: CPRM-16

